

Magnetic Plate

Magnetic Plate are versatile and can be utilized in various processes. These units are usually installed above transfer conveyors and vibratory feeders to attract 'tramp' type contamination and any loose machinery that has fallen off during the manufacturing or packaging stages.

Magnetism is only present on one face ensuring that no surrounding sensitive process machinery is affected. 'Tramp' contamination can be attracted from the conveyor surface even when trapped underneath the product.

Due to the Magnetic Plate being highly visible once installed, any attracted contamination can be easily seen. In most cases this contamination can be removed by hand.



Technical data

Magnetic performance: 4'000Gs

Materials of housing and other parts: 304 stainless steel/316 stainless steel

Surface finish: Brushed

Options: Easy clean version

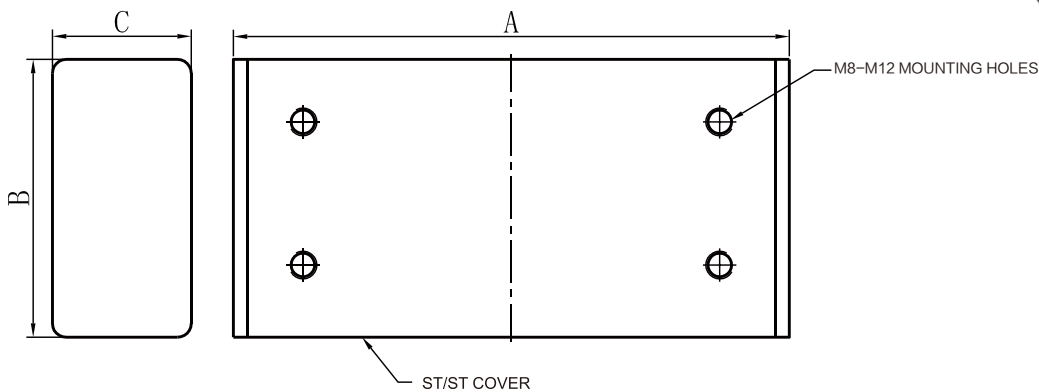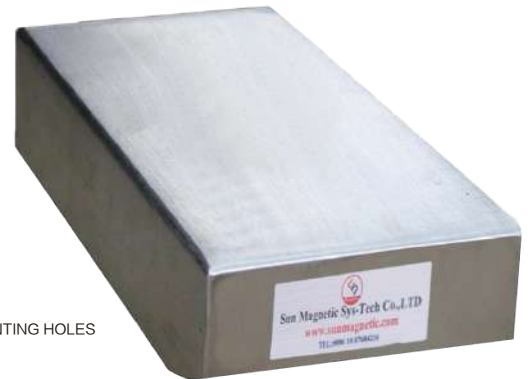

Model No.	Dimension (mm)		
	A	B	C
SCXB200	200	100	50
SCXB300	300	150	50
SCXB400	400	200	50
SCXB500	500	200	50
SCXB600	600	200	75
SCXB700	700	300	75
SCXB800	800	350	75
SCXB900	900	400	100
SCXB1000	1000	400	100

*Customized type and size are available



Beijing OeMag International Co., Ltd

Tel: +86-10-67609550; Fax: +86-10-67609565; E-mail: oeomag@oeomag.com